

TO : _____

TECHNICAL SPECIFICATION**10.1 Inch EM Touch Board****MODEL NO.: MSTP-101-H1-S1**

The content of this information is subject to be changed without notice.
Please contact HANVON or its agent for further information.

 Customer's Confirmation

By _____

Date _____

 HANVON's Confirmation

APPROVED	CHECKED	CHECKED	DESIGNED
马梁	高洋		姜海力

TECHNICAL SPECIFICATION

CONTENTS

1. Scope.....	4
2. Features	4
3. General Specifications.....	4
4. Appearance.....	5
5. Mechanical Drawing	6
6. Signal Assignment.....	7
7. Electrical Characteristics	8
8. Idle Mode*	9
9. Sleep Mode*	9
10. Asynchronous Serial Communication Protocol.....	9
11. Block Diagram.....	10
12. Pen Accuracy	11
13. RoHS Report.....	13
14. Reliability Test	14
15. Labels.....	15
16. Packing	17

1. Scope

This specification is applicable to HANVON Electromagnetic Touch Board designed for 10.1 inch Tablet PC.

This specification applies to HANVON MSTP-101-H1-S1 only.

2. Features

- Without affecting the screen display
- High screen resolution
- High pressure levels
- High position accuracy
- Low power consumption
- Commercial temperature range
- Support battery-free, cordless and pressure sensitive pens


3. General Specifications

Parameter		Specifications	Unit	Note
Sensor Board	External Dimension	209.692(L)×162.52(W) ×0.4(H)	mm	±0.2mm(L,W) ±0.05mm(H)
	Effective Diagonal Size	10.1	inch	4:3
	Active Area	202.692(L) × 152.019(W)	mm	±0.2 mm
	Material	FPC	-	
	Resolution	10206*7422	-	
	Coordinate Accuracy	0.03	mm	
	Detectable Height	>3	mm	
Control Board	External Dimension	40(L) ×25(W) ×1.9(H)	mm	±0.2mm
	Material	FPC + Steel-plate	-	
	Physical Interface	8 Pins FPC/FCC Connectors	-	
	Pen Accuracy	±1.0/2.0	mm	Center /Edge
	Detectable Angle	±50°	-	


	Data Sending Rate	>130	dots/s	7Bytes/dot
	Response Time	<200	ms	
	Tracking speed	>1	m/s	
	Data Transferring Rate	19.2(adjustable)	kbps	UART
	Voltage/Current	3.3V/<20mA	-	
Others	Module Weight	32	g	±0.2g

Note:
 This specification is for standard module. For better performance, it needs to be customized by customer's system.

4. Appearance

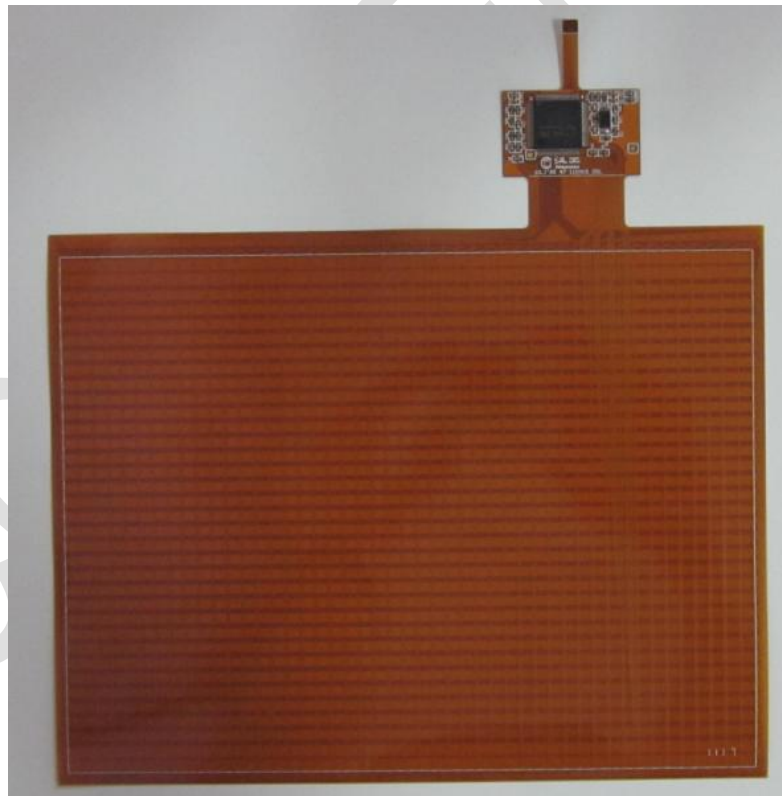

5. Mechanical Drawing

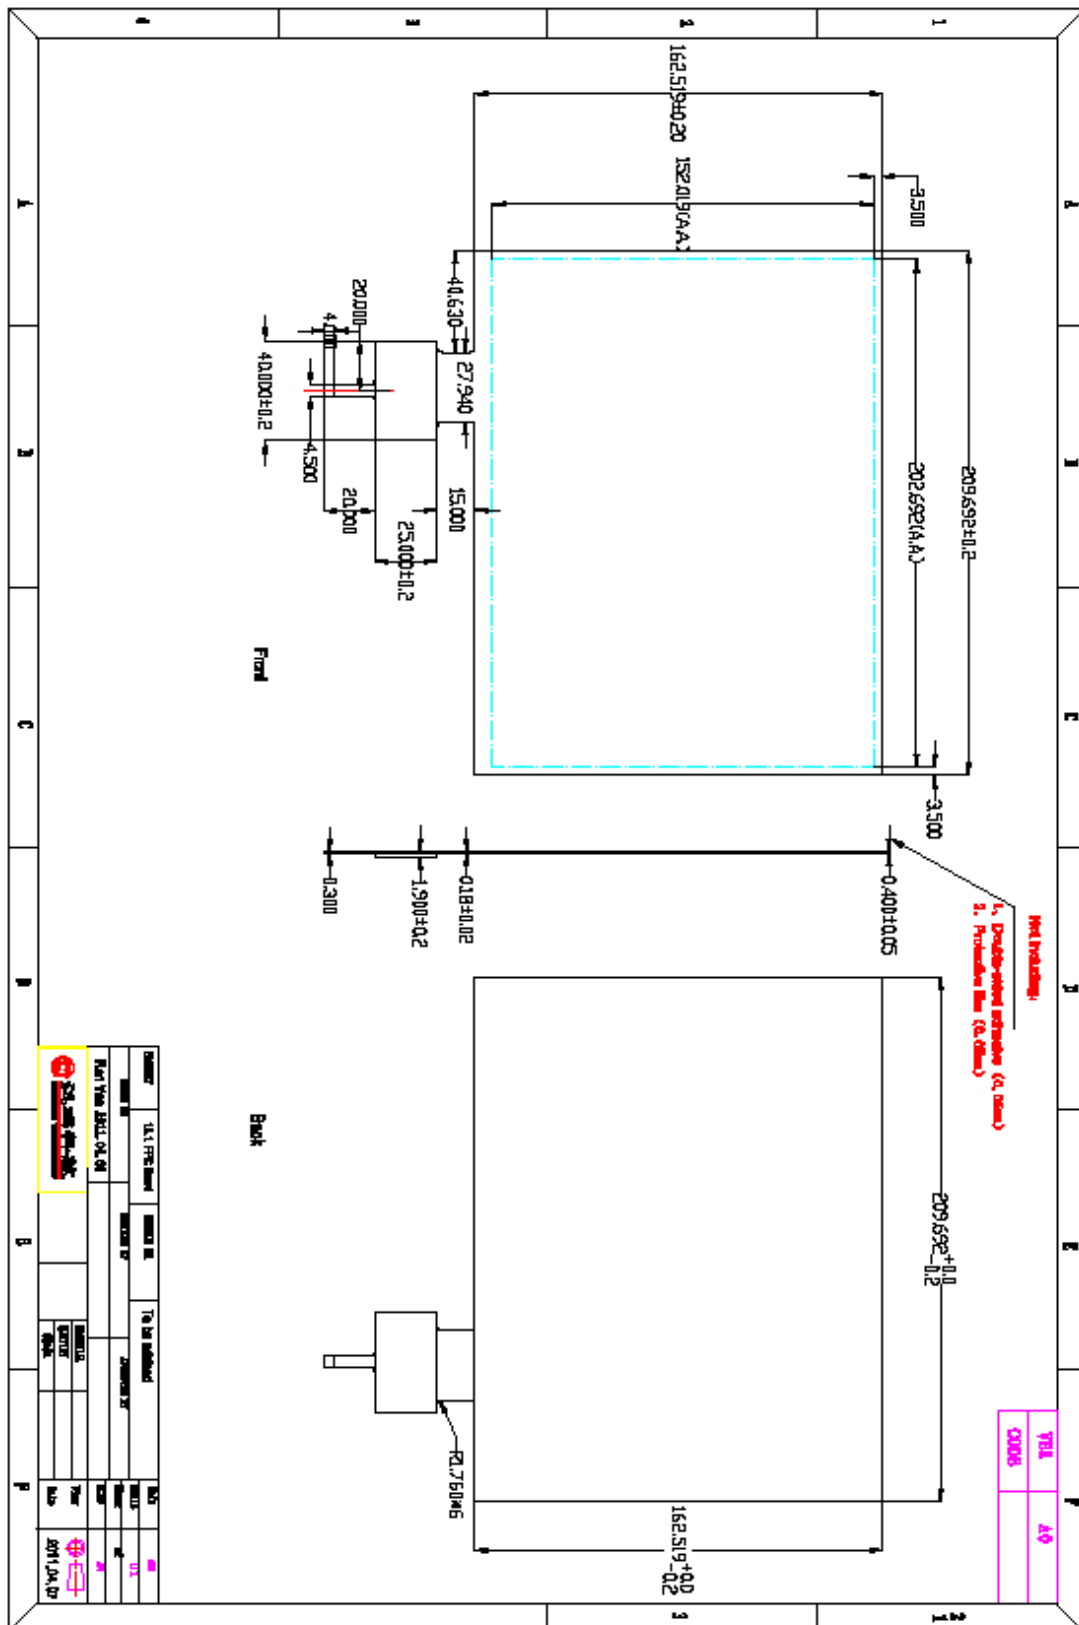

6. Signal Assignment

Pin#	Signal	In/out	Description
1	BKGD		No connection, only for HANVON to update program
2	PEN	O	Pen Checking Signal (When the pen is found, output '0'; otherwise output '1')
3	TXD	O	Serial Data Output Signal
4	RXD	I	Serial Data Input Signal
5	SLP	I	No use
6	RST	I	Reset (Active: Low)
7	VDD		Power Supply(3.3V)
8	GND		Ground

Note:


1 Logic Low: $0 < U_L < 0.2 \times V_{DD}$;

Logic High: $V_{DD} - 0.3 < U_H < V_{DD}$.

2 Connectors: 20268-014E-01# or equivalent;

7. Electrical Characteristics

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Ground	GND	-	-	0	-	V
Digital Power Supply	V_{DD}	-	-	5.0	-	V
	I_{VCC}	$V_{CC}=3.3V$	4	16	20	mA
Sleep Power	SLP	SLP = '1'; $V_{CC}=3.3V$	0.10	0.33	0.70	mW
Reset Time	RST	$I = 10mA$	50	70	100	ms
Sleep Time	SLP	SLP = '1'; $V_{CC}=3.3V$	10	20	50	ms
Awake Time	SLP	SLP = '0'; $V_{CC}=3.3V$	15	20	50	ms
Power Cycle	-	$V_{CC}=3.3V$	50	100	150	ms

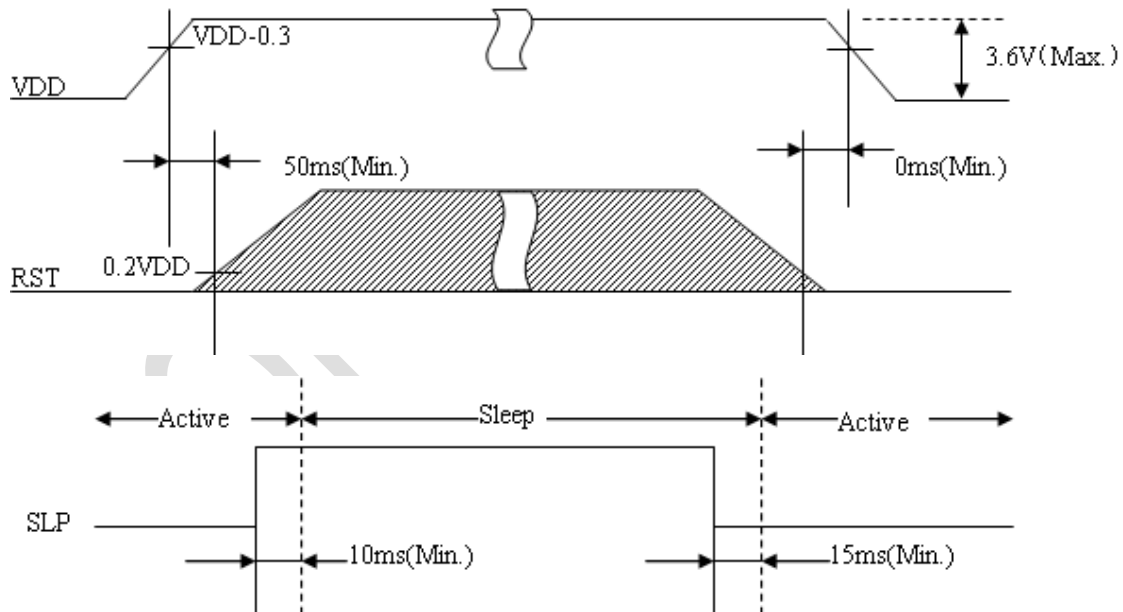

8. Idle Mode*

If the board do not find the pen in 3 seconds, the board enters idle mode (Max. current < 10mA).

9. Sleep Mode*

When the board enters Sleep mode, the board current is less than 1mA.
The interval between two Sleep modes must be longer than 100ms.

SLP	State	Switch Time(Min.)	Note
0	Active	15ms	From Sleep to Active
1	Sleep	10ms	From Active to Sleep

Note*:

Idle mode and Sleep mode are not available for TP-101W03-H1S1-YV. They are optional functions, which can be customized by customer's system.

10. Asynchronous Serial Communication Protocol

19.2kbps, 1-bit start, 8bits data, 1-bit stop, parity none.
Data Format: 7bytes for a data packet (Data), as follows:


	7bit	6bit	5bit	4bit	3bit	2bit	1bit	0bit
Byte0:	1	D6	D5	D4	D3	D2	D1	D0
Byte1:	0	X ₁₅	X ₁₄	X ₁₃	X ₁₂	X ₁₁	X ₁₀	X ₉
Byte2:	0	X ₈	X ₇	X ₆	X ₅	X ₄	X ₃	X ₂
Byte3:	0	Y ₁₅	Y ₁₄	Y ₁₃	Y ₁₂	Y ₁₁	Y ₁₀	Y ₉
Byte4:	0	Y ₈	Y ₇	Y ₆	Y ₅	Y ₄	Y ₃	Y ₂
Byte5:	0	P ₆	P ₅	P ₄	P ₃	P ₂	P ₁	P ₀
Byte6:	0	X ₁	X ₀	Y ₁	Y ₀	P ₉	P ₈	P ₇

Note:

- 1 The MSB (most significant bit) of each Byte0 is always 1, indicating the start of a packet.
- 2 D0 = 1 indicates the pen has put pressure on the screen.
- 3 D1 = 1 indicates the programmable key has been pressed down.

- 4 D_2 、 D_3 、 D_4 default 0.
- 5 D_5 defaults 1.
- 6 $D_6 = 1$ indicates the pen has left the effective handwriting area. Under this situation, $D_0 = 0$, X_n and Y_n indicate the last known coordinates of the pen, $P_n = 0$.
- 7 When $D_6 = 0$, $D_4 = 0$, $D_0 = 0$, Data packets are not sent.
- 8 X_{0-15} indicates the n th bit of the X coordinate. The most left side of the screen corresponds to $X = 0$, and the most right side of the screen corresponds to $X = 0x27DE$
- 9 Y_{0-15} indicates the n th bit of the Y coordinate. The most above side of the screen corresponds to $Y = 0$, and the most below side of the screen corresponds to $Y = 0x1CFE$.
- 10 P_{0-9} indicates the n th bit of the pressure, which ranging from 0 to $0x3FF$.

11. Block Diagram

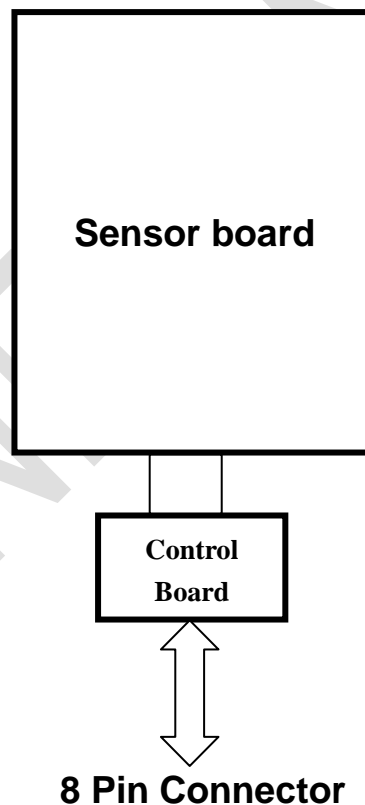

12. Pen Accuracy

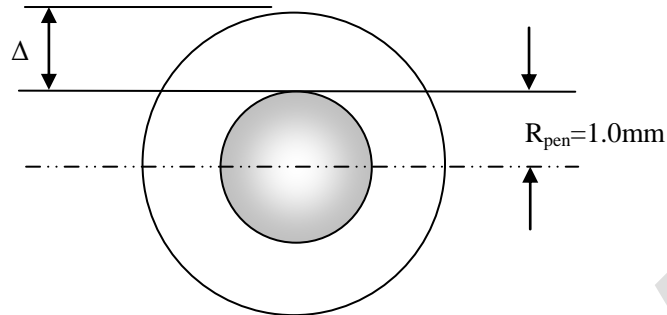


Figure 1 R_{pen} and Δ

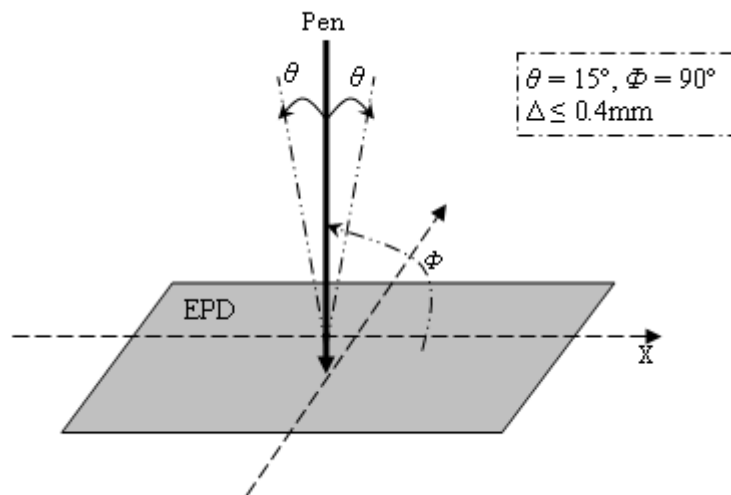


Figure 2 $\Phi = 90^\circ, \theta = 15^\circ: \Delta \leq 0.4\text{mm}$

Note 1: If noise exists, Δ will increase.

Note 2: At the edge of the sensor board, Δ will add to more than 0.4mm.

Note 3: Writing angle (Φ) must be greater than 40 degrees.

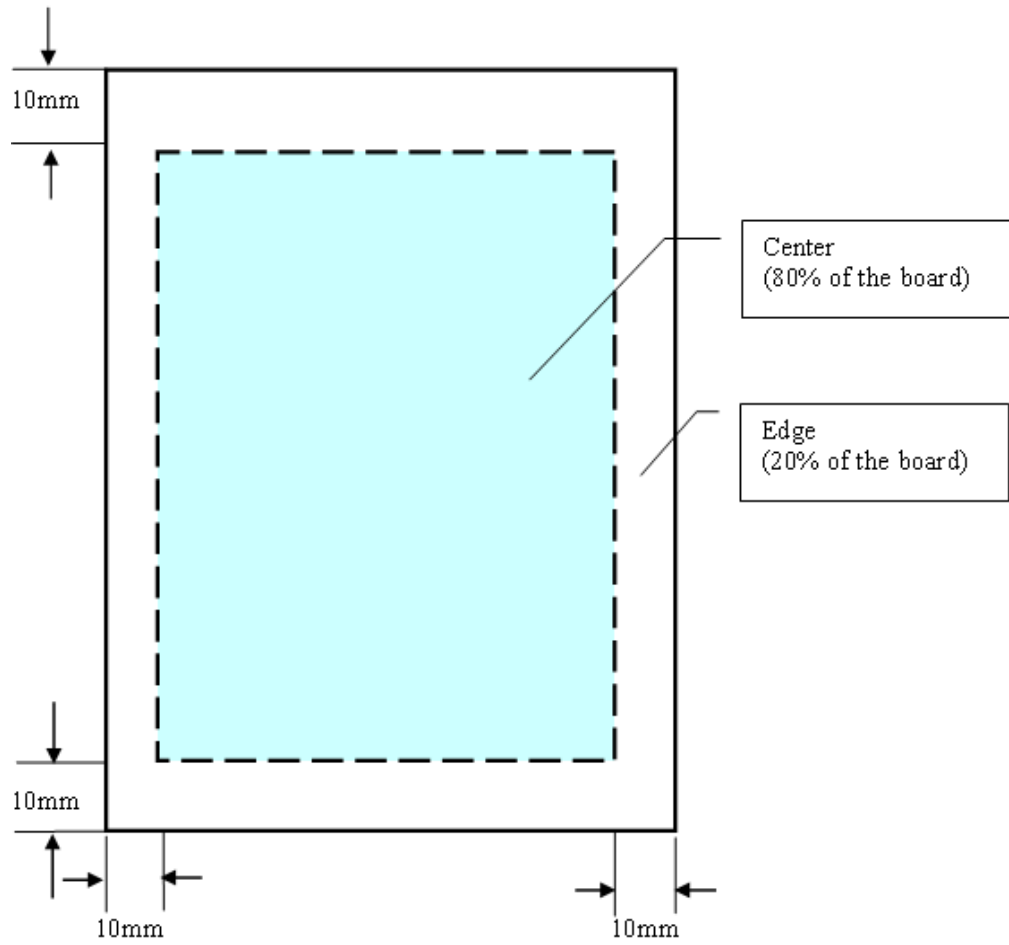


Figure 3 Center/Edge of the sensor board

13. RoHS Report

CONFIDENTIAL

14. Reliability Test

Test Conditions:

1. The Electromagnetic Touch Board should be inspected as regular functional testing.
2. No condensing of water (moisture) is allowed on the Electromagnetic Touch Board.
3. For environmental tests, temperature gradient is 15°C/hour.
4. The number for the test samples is 10 units.

Item	Test condition	Criterion
Operating Environment	(1) High temperature 50°C 72hrs (2) High humidity 85% 72hrs (3) Low temperature -10°C 72 hrs After changing the environment, condition is brought back to normal (15 - 35°C, 25-75 % (RH)). Another one or more hours later, functional test is performed.	No malfunction
Storing Environment	(1) High temperature 60°C 72hrs (2) High humidity 85% 72hrs (3) Low temperature -20°C 72hrs After changing the environment, condition is brought back to normal (15 - 35°C, 25-75 % (RH)). Another one or more hours later, functional test is performed.	No malfunction
Package Drop	(1) Height : 80cm (2) Floor surface : Concrete (3) Number of drops : A corner of the bottom panel 1 An edge between bottom and end panels 1 An edge between bottom and side panels 1 An edge between side and end panels 1 All six panels 6 Total 10 drops	No malfunction
Package Vibration	(1) Z axis : 2G (2) X and Y axis : 1G (3) Frequency : 5~200Hz Sweep	No malfunction

15. Labels

15.1 Green Label




Label Material: White color

Label Ink: Green

Label Location: Paste on the middle of the board backside

15.2 Bar Code Label

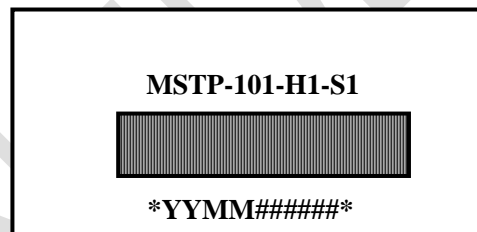

Serial number: YY: Year produced

MM: Month produced

#####: Serial number in the month

Label Material: White color

Label Ink: Black

Label Location: Paste on the bottom of the board backside

15.3 Inner Box Label

CP No.	*****
Q'ty/Box (pcs):	
P No.:	MSTP-101-H1-S1
<u>Hanwang Technology CO., LTD.</u>	
<u>MADE IN CHINA</u>	

Label Material: White color Label Ink: Black
Label Location: Paste on the upside of the inner carton

15.4 Shipping Mark Label

PRODUCT NAME: 10.1Inch EM Touch Board
CP NO.:
P NO.: MSTP-101-H1-S1
QTY:
CARTON NO.:
DIMENSION:
GROSS WEIGHT:
NET WEIGHT:
Hanwang Technology Co., Ltd.
MADE IN CHINA
Handle with Care Keep Upright

Label Material: White color Label Ink: Black
Label Location: Paste on the side face of the outer carton

16. Packing

